


Name \_\_\_\_\_

Date \_\_\_\_\_

# Alignment Diagnosis and Service

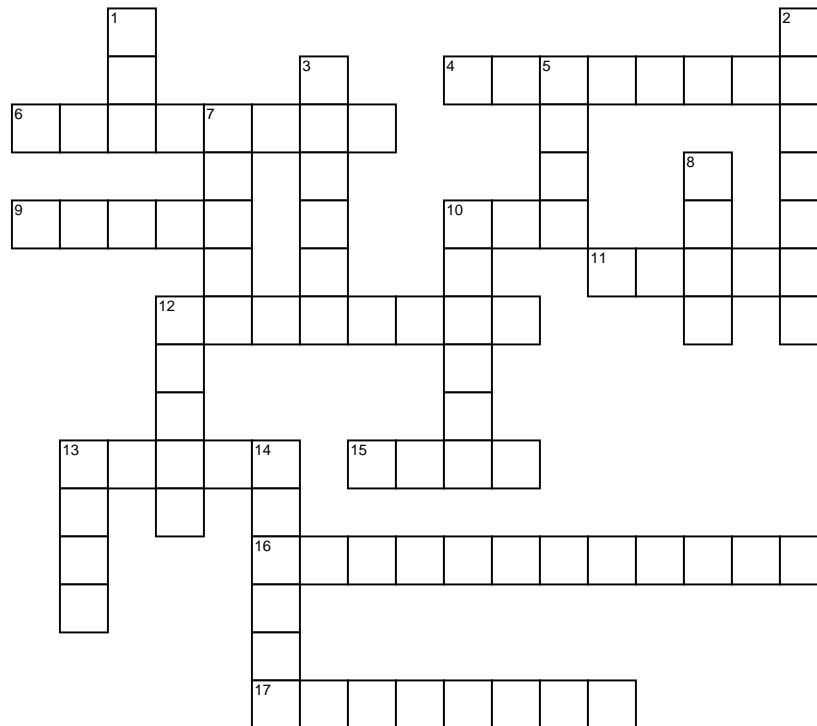

Puzzle by Tony and Lara Martin. [www.CrosswordWeaver.com](http://www.CrosswordWeaver.com)

## ACROSS

- 4 Toe-in is also known as \_\_\_\_\_ toe
- 6 All tires should be checked for proper inflation \_\_\_\_\_
- 9 Steering wheels are attached with a spline and a \_\_\_\_\_
- 10 Eccentric \_\_\_\_\_
- 11 \_\_\_\_\_ grinding compound can be used to help loosen fasteners
- 12 The "fifth" wheel
- 13 \_\_\_\_\_ toe: combined toe angle of both wheels on the same axle
- 15 \_\_\_\_\_ plates: front wheels rest on these during alignment
- 16 Calibrating the wheel sensor
- 17 Frames can be checked by measuring \_\_\_\_\_ points

## DOWN

- 1 The last of the alignment angles to be adjusted
- 2 Toe can be measured in inches or in \_\_\_\_\_
- 3 Another term for subframe
- 5 Thin spacer used to adjust alignment angles
- 7 The length of the \_\_\_\_\_ rod can be changed to adjust caster
- 8 A dragging brake can cause a vehicle to \_\_\_\_\_
- 10 Overinflation will wear the \_\_\_\_\_ of the tire
- 12 \_\_\_\_\_ minutes = one degree
- 13 Always \_\_\_\_\_ drive the vehicle after making a repair
- 14 The steering wheel must be \_\_\_\_\_ while the toe is adjusted

